


## Slideway lubricant

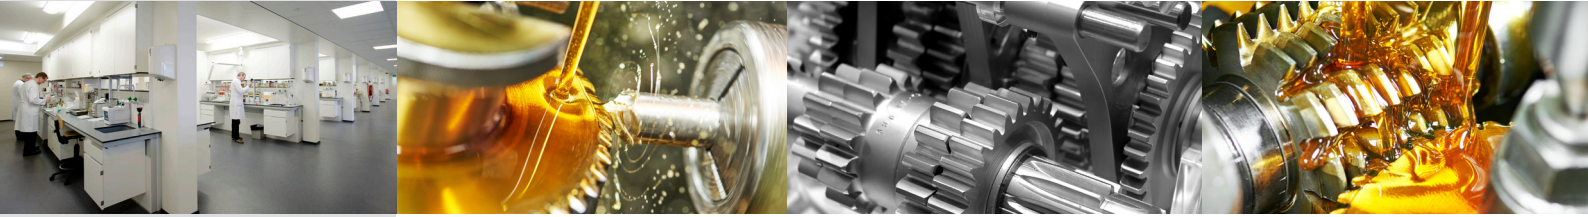

### Description

Milpro WAY VG220 is an universal machine tool lubricant, based on mineral oil, under addition of several additives.

### Application

This oil is a machine tool lubricant specially designed for tableway lubrication, with emphasis on superior stick-slip properties. This machine tool lubricant also meets the requirements of hydraulic systems, gear boxes and spindles in most machine tools.

### Features and benefits

- Good resistant towards high pressures and high loads.
- A very strong adhesion to (vertical) slides.
- Superior "stick-slip" properties.
- Very good anti- wear, anti-rust and anti-foam properties.
- Excellent demulsification properties.
- Good filterability.

### Performance level

Cincinnati Milacron P-50

DIN 51517/3

FZG >12

US Steel 224

## Typical characteristics

	Test method	Units	Grade
ISO viscosity grade			220
Density at 15°	ASTM D4052	Kg/L	0,898
Viscosity at 40°C	ASTM D445	mm <sup>2</sup> /s	220
Viscosity at 100°C	ASTM D445	mm <sup>2</sup> /s	19,2
Viscosity index	ASTM D2270		>95
Flash point COC	ASTM D92	°C	>230
Pour point	ASTM D97	°C	<12
Copper corrosion	ASTM D130		1 A/B

Above figures are typical of those obtained with normal production tolerance and do not constitute a specification.

## Handling and storage

All packages should be stored under cover. Outside drums should be in a horizontal position. Protect against freezing and temperature above 40°C.

## Packaging type

5, 25, 200 and 1.000 litres and bulk.

## Safety Data Sheet

The Safety Data Sheet should be consulted for specific information and information on Health, Safety and Environment when handling this product.



**Cimcool Industrial Products**  
Schiedamsedijk 20  
3134 KK Vlaardingen  
The Netherlands  
Tel: +31 (0)10-4600660  
cimcool.eu@duboischemicals.com  
[www.cimcool.com](http://www.cimcool.com)

